


Padlock SMK-PL1

Installation Guide v2.0



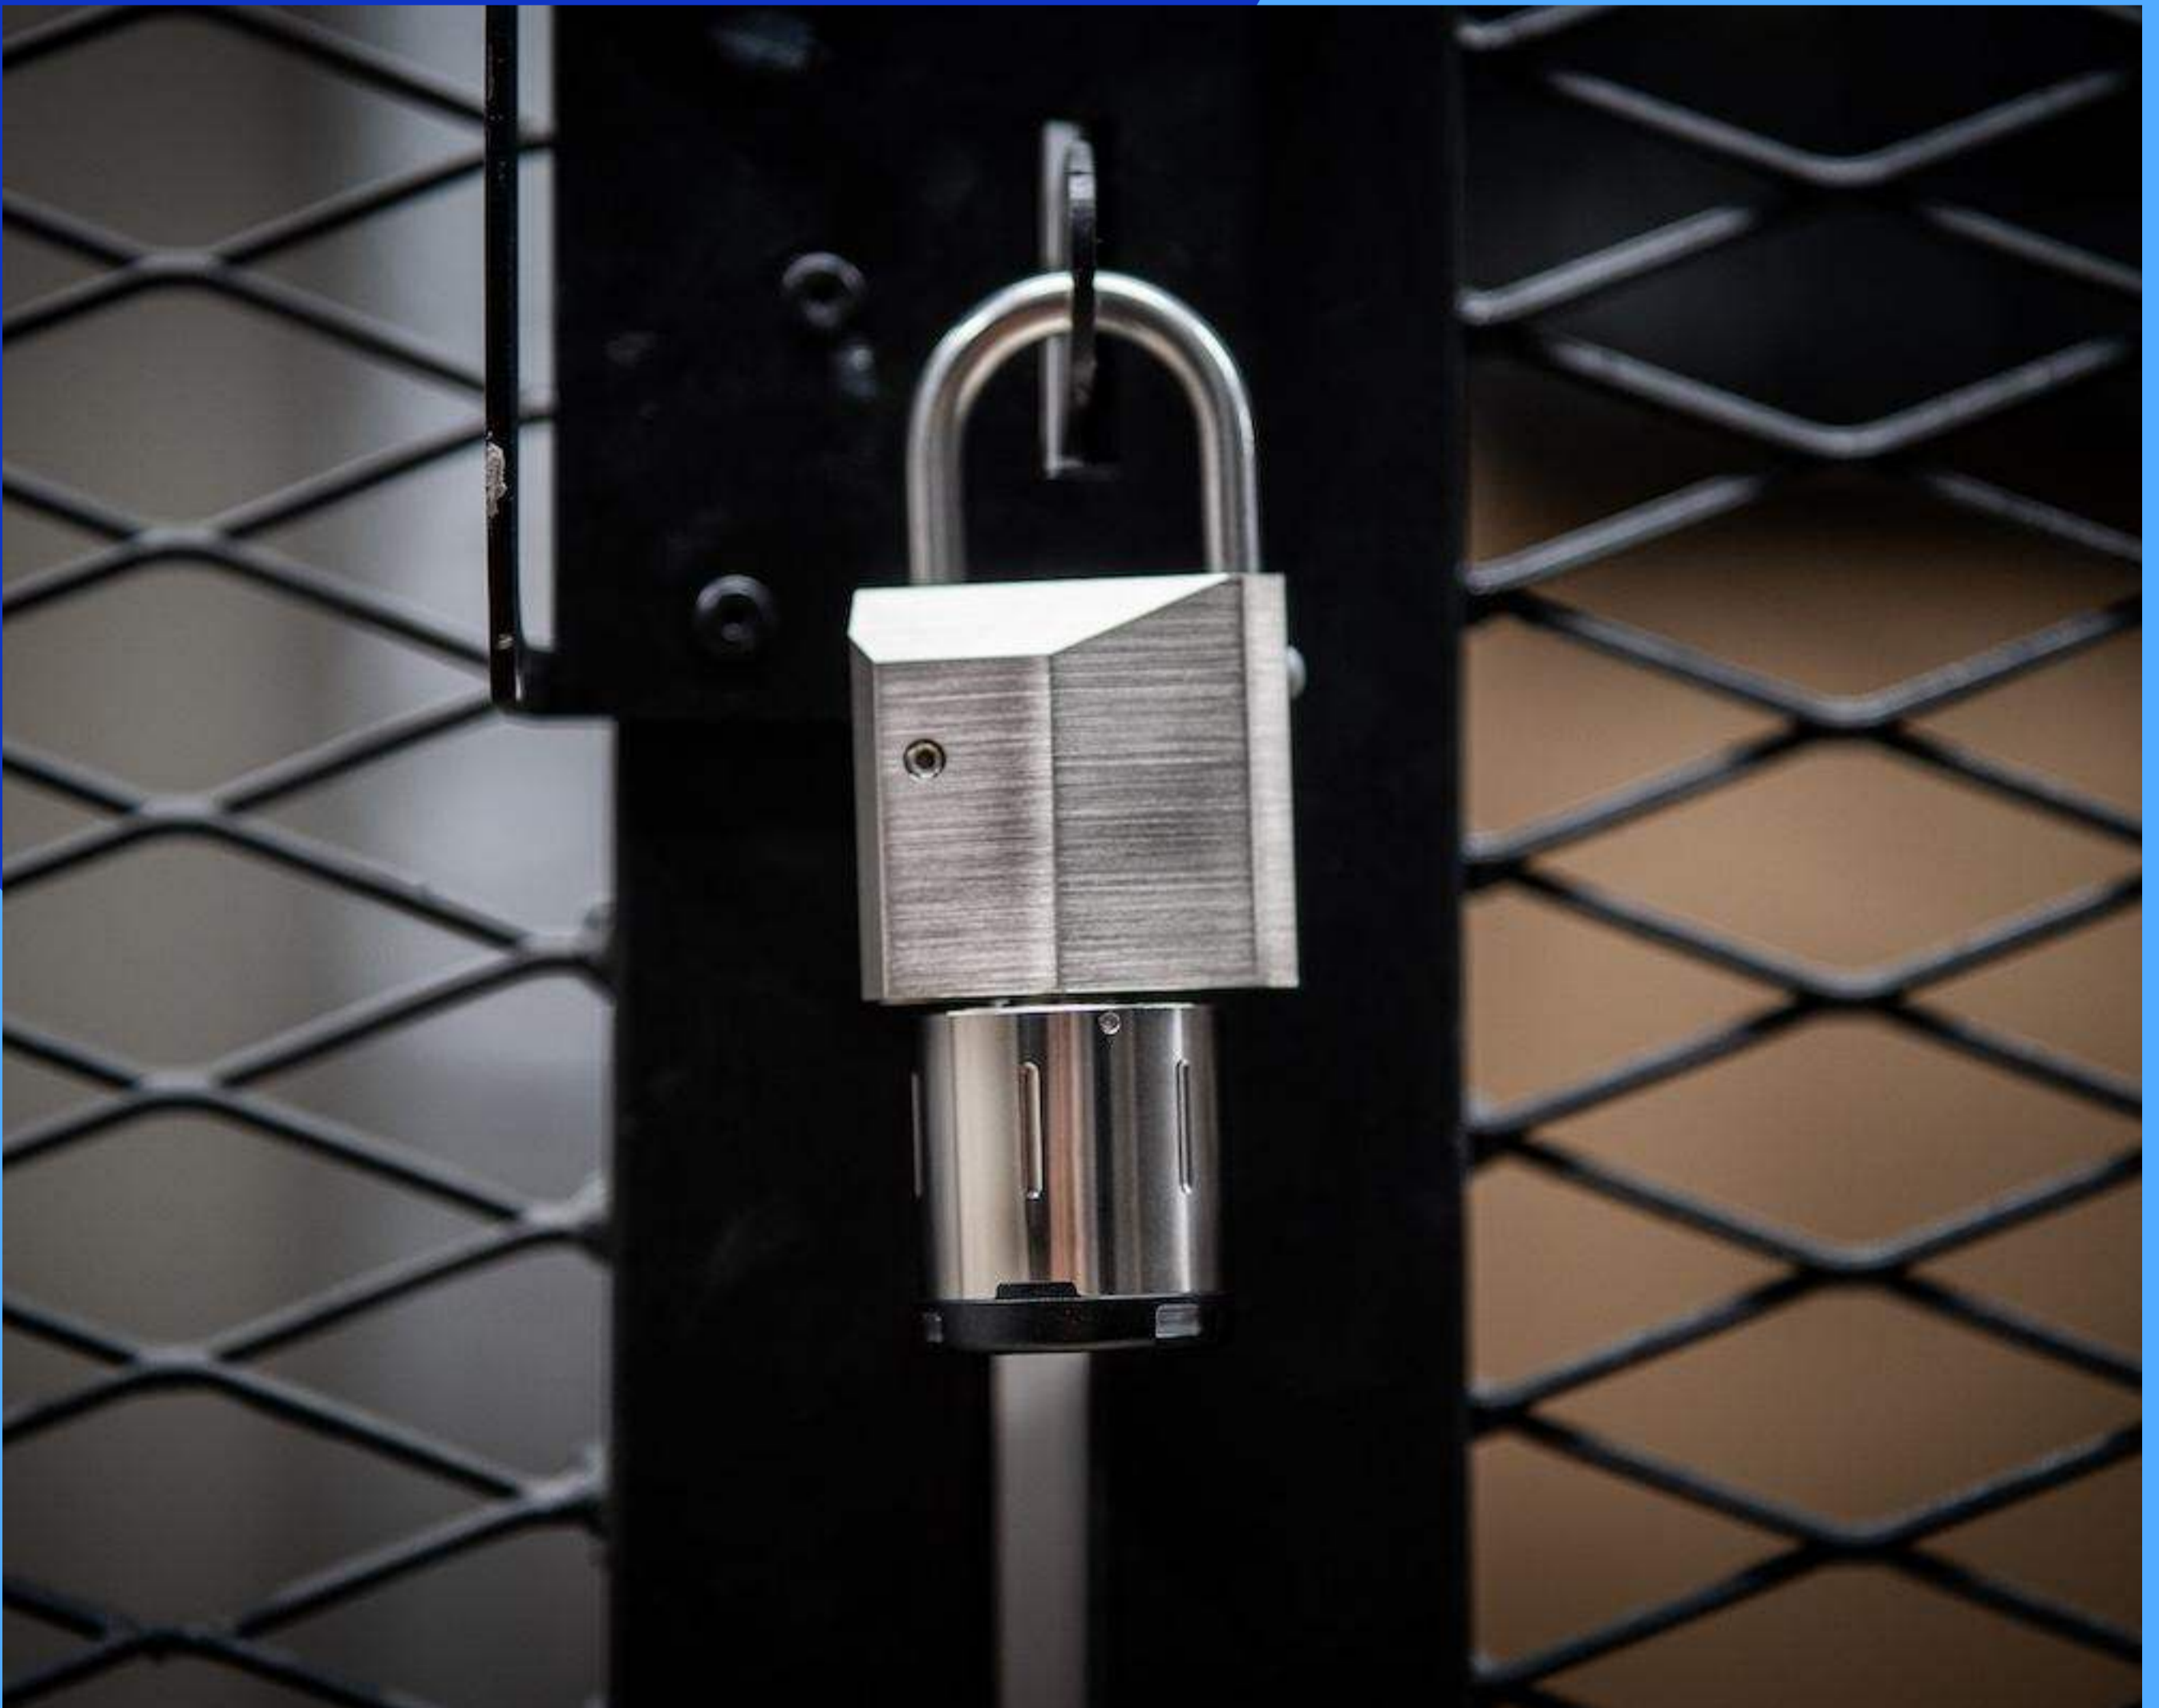

Activation

Step 1

Download the Smart MasterKey app from the App Store or Google Play.

Skip to step 3 if you already have personal or organisation profile create.




App Store



Google Play

Step 2

Tap **Get Started** to create an account in the app and/or log in.

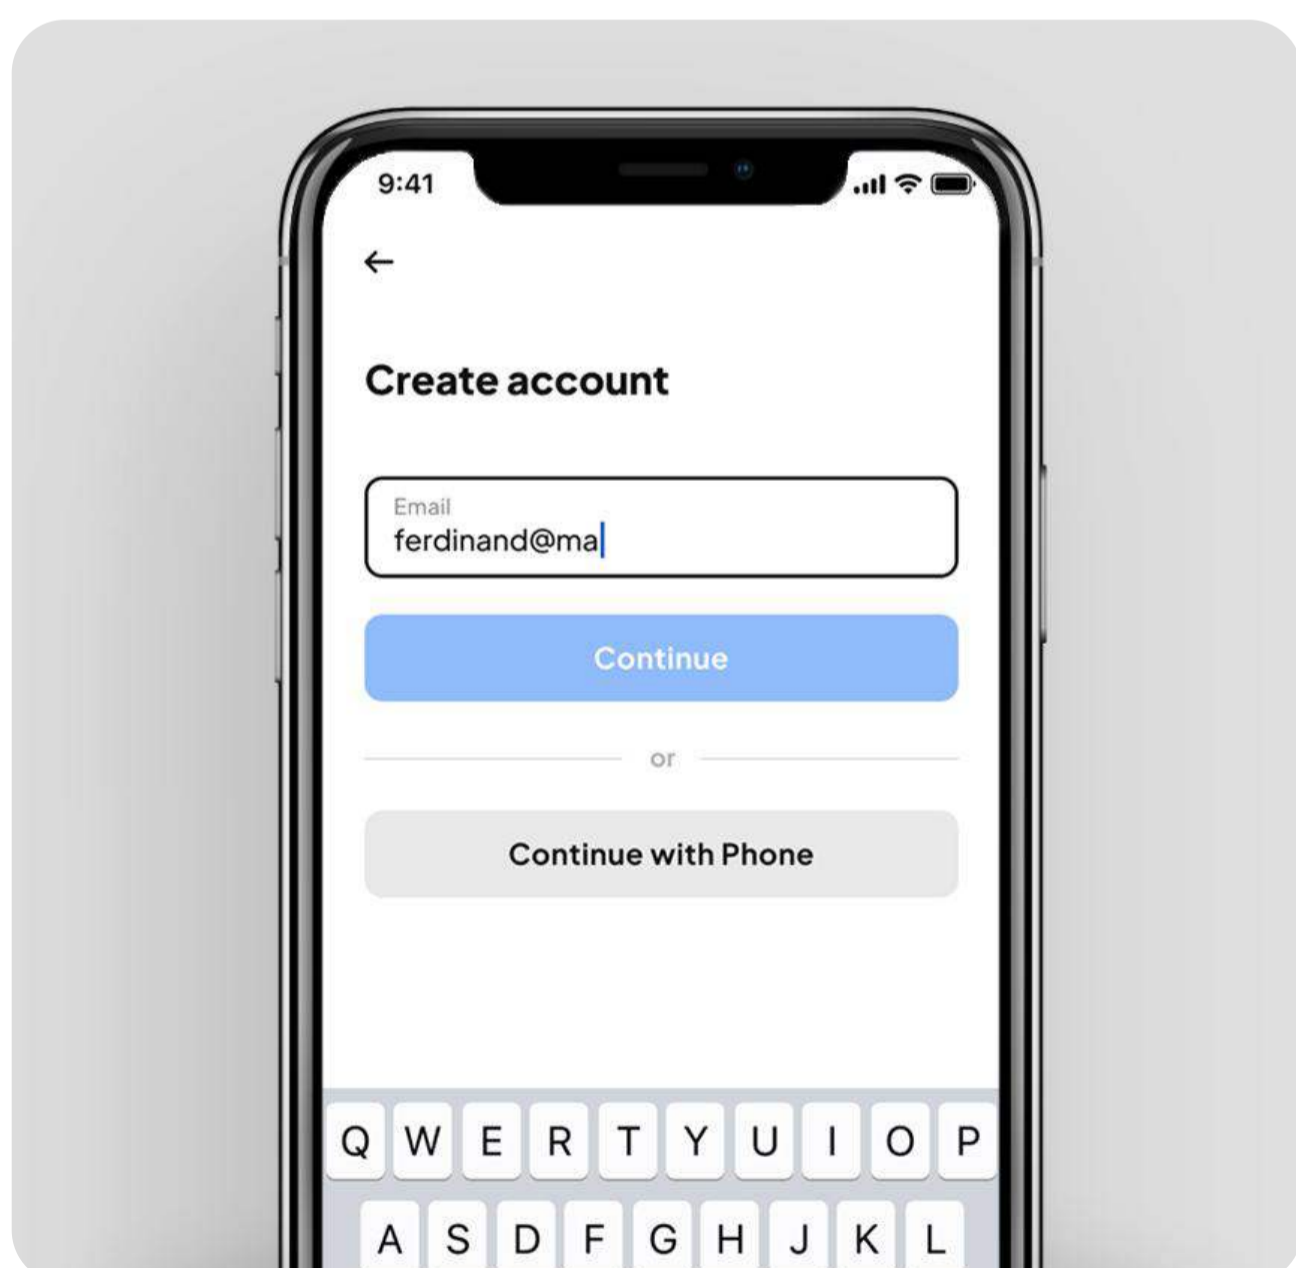



Activation

Step 3

In the Smart MasterKey mobile app choose personal or intended organization profile under which the lock should be added.

Please note that organization profiles can only be created on web portal - <https://admin.smartmasterkey.com/>. After the organization profile is set you can switch to the profile in mobile application and proceed with lock setup.

Step 4

Tap **Add a lock module** and scan the QR-code that came with the lock (the label with the QR-code is under the battery cover).






Activation

Step 5

You are ready to use your new padlock. Tap the lock button in the app to activate the cylinder and try it out.

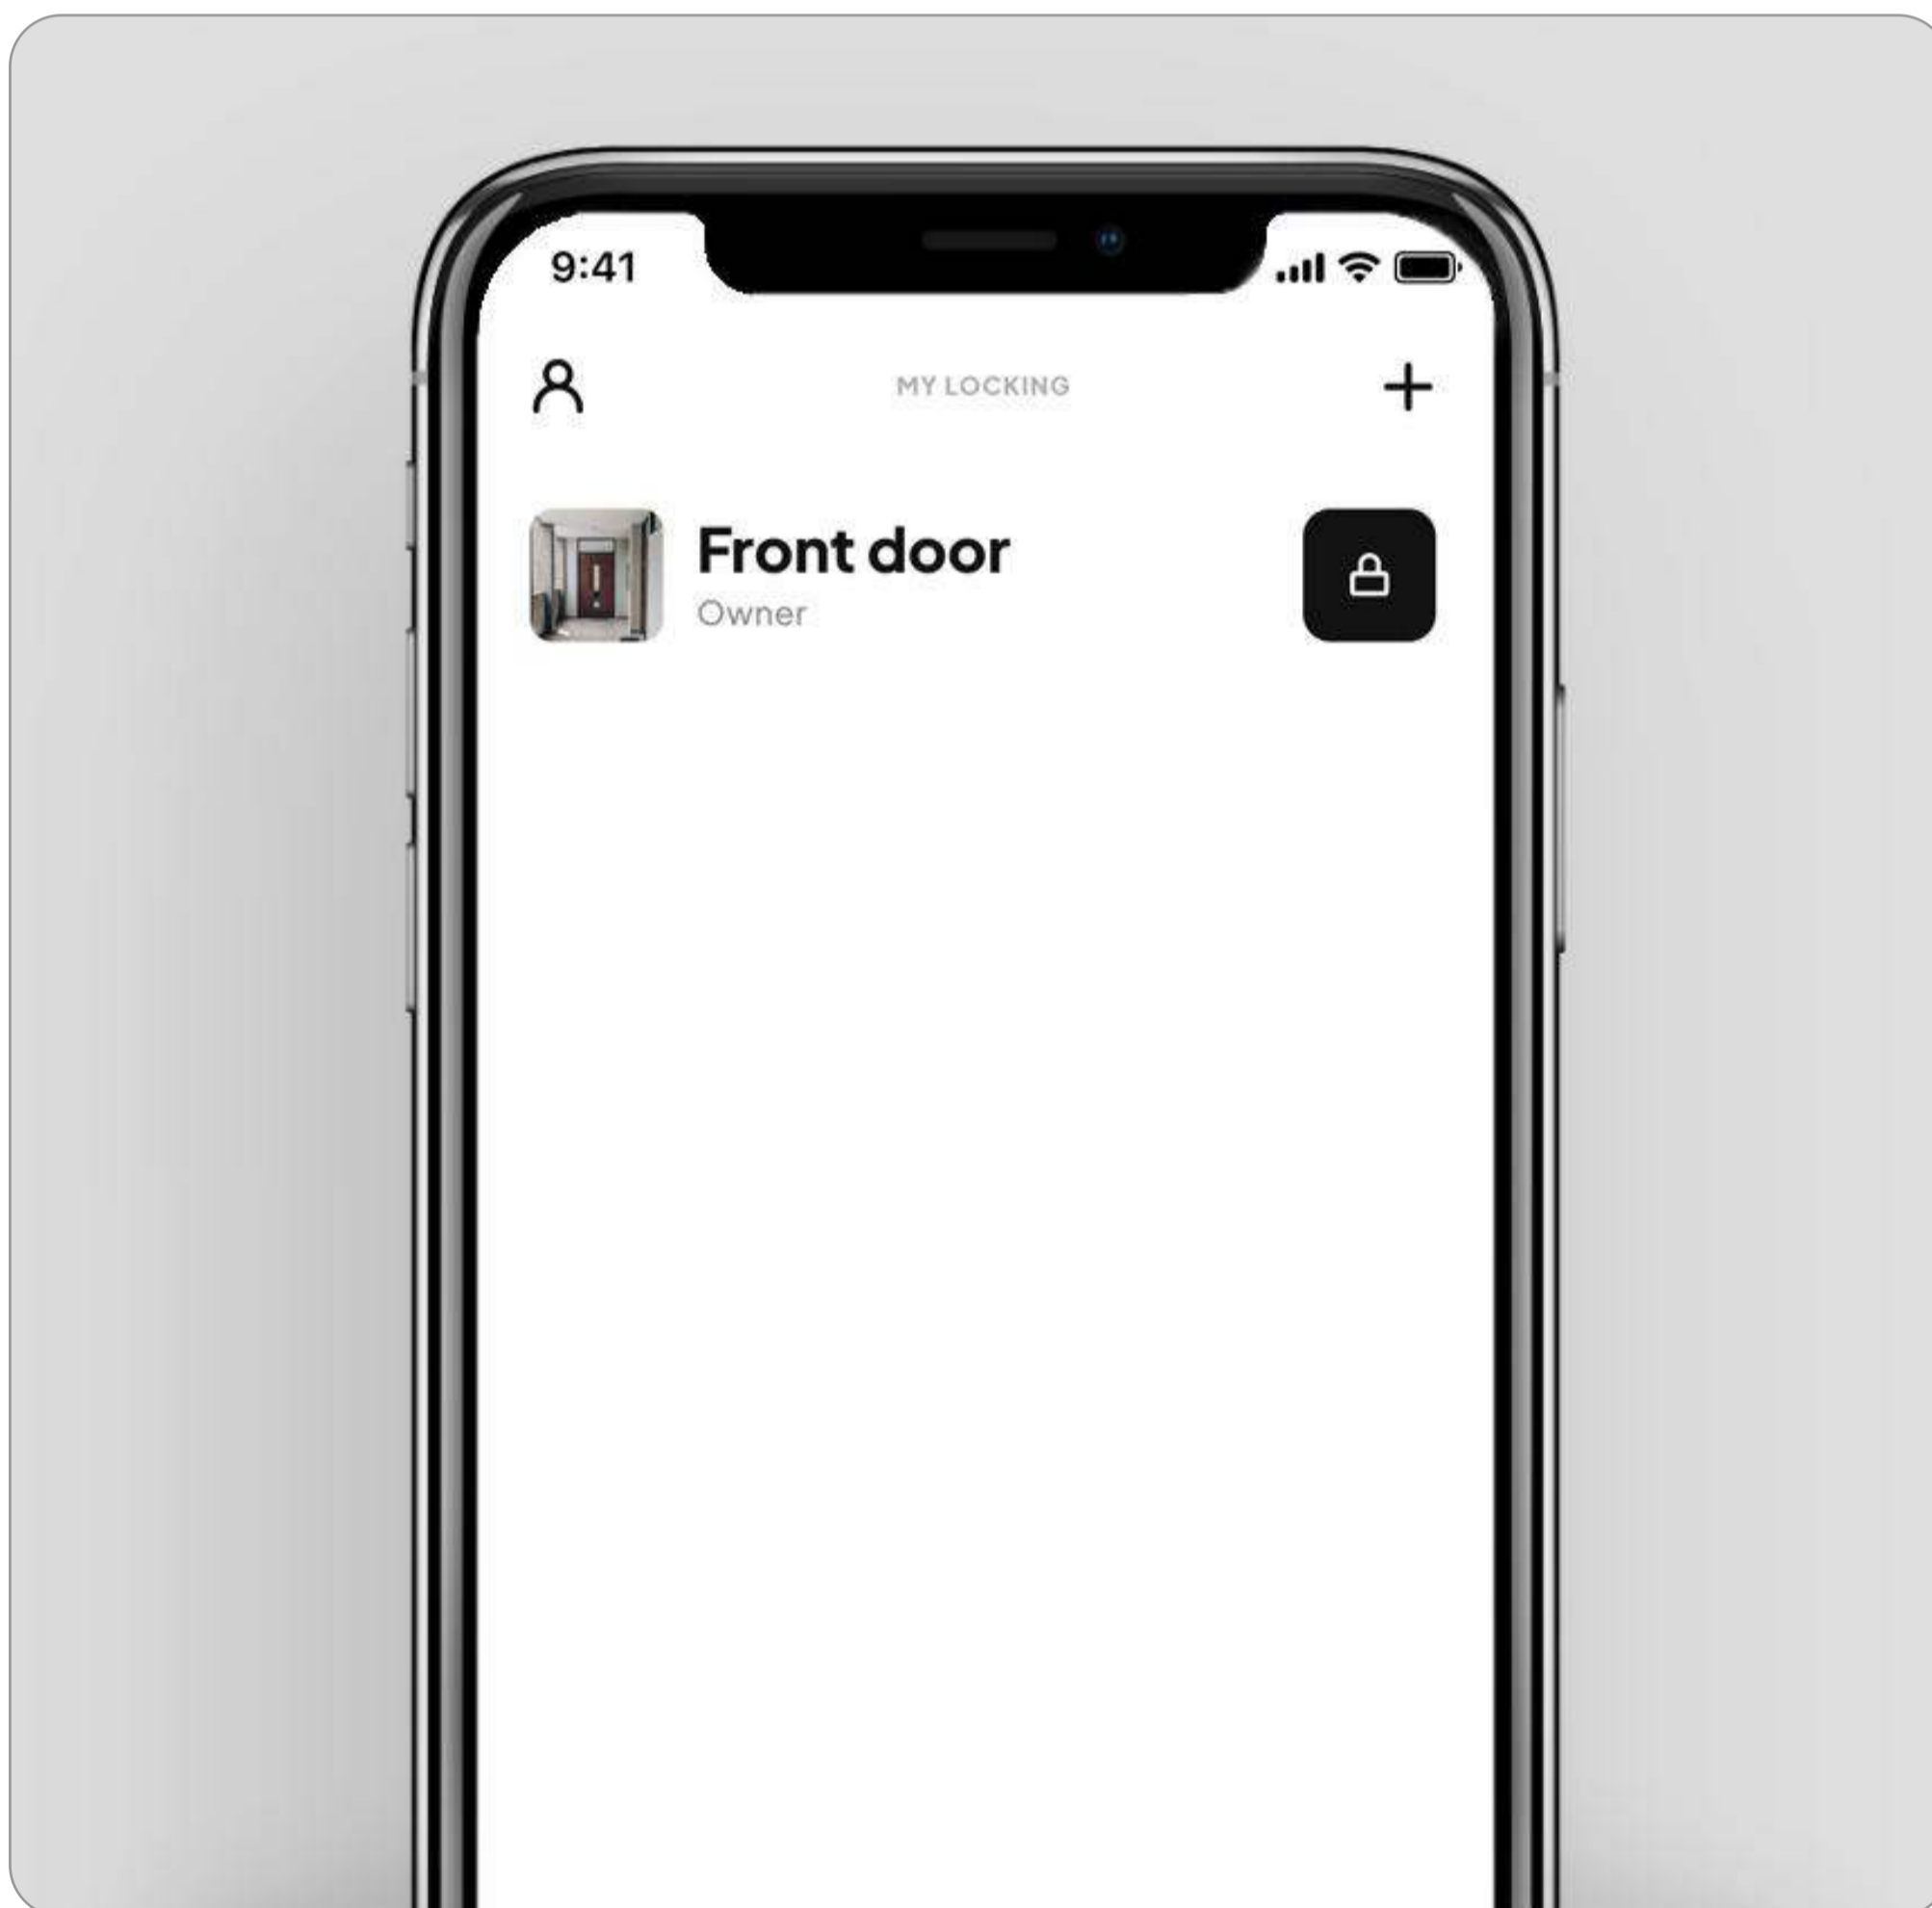



Install knob on padlock

Attach the electronic knob on the padlock. The padlock is now fully ready to be used.





How to use

Operating/using the Padlock

By default, the padlock will be in secure mode and the electronic knob will spin freely without operating the lock.

How to open the door using the Smart MasterKey app:

1. Log in to the Smart MasterKey mobile app.
2. Tap on the lock button in the app to activate the knob.
3. Turn the knob to operate your lock.
4. The knob is active for 5 seconds, after which it will enter secure mode.

How to remove the electronic knob?

1. Open your door.
2. In the Smart MasterKey app, tap on your lock.
3. Tap on “Detach electronic knob”.
4. Tap on “Enable mounting mode”.
5. Turn the knob slowly while pulling it - when the disassembly mode is activated, you have 10 seconds to remove the knob.

How to remove the battery cover?

1. In the Smart MasterKey app, tap on your lock.
2. Tap on “Open battery cover”
3. Tap on “Open” - you now have 30 seconds to open the cover.
4. Press down the pins in the cover with a needle or a pen. While the pins are pressed down, remove the cover by pulling hard.
5. After replacing the batteries, press the “Open” button again and put the cover back while pressing down the pins.

When do the batteries need replacing?

The batteries need to be replaced when you hear 5 consecutive beeps after activating the cylinder.



Note: The time during which the cylinder is active can be changed in the app.



Product details

Materials	Stainless steel design. Padlock and knob housing as well as shell made of nickel-plated brass. Hard plastic cover for the antenna area.
Physical properties	Padlock: H= 93mm, W=55mm, D=25mm Padlock loop: \varnothing =8mm Electronic knob: \varnothing = 40mm
Power supply	2x CR2 lithium battery
Communication protocols	BLE (Bluetooth Low Energy), RFID
Operating temperature	-25°C to +65°C



Smart
Master
Key

Gold Standard for Key Solutions

Sales
sales@smartmasterkey.com

Customer support
support@smartmasterkey.com

smartmasterkey.com